VTO2101E-P-S1

IP Villa Outdoor Station



Features


- HD CMOS camera
- Zinc alloy panel, IP65,IK10
- ICR Night vision &Voice indication
- Video & Audio messaging
- TCP/IP,SIP
- Surface mounted
- IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)




Technical Specification	
Model	VTO2101E-P-S1
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Camera	
Image Sensor	1/2.7" 2MP CMOS
Focal Length	2.8mm
Angle of View	H:77°, V:55°, D:100°
Angle of View adjustment	Horizontal:-45° – +45°
Video	
Video Compression	H.264
Video Streaming	Dual Stream
Day/Night	Auto(ICR), 5m
BLC Mode	WDR
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
OSD	Support
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Audio processing	Noise suppression, Echo cancellation

Operation Mode	
Keypad	1 Mechanical Button
Interface	
Door Control	1
Alarm In	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP, SIP
General	
Ingress Protection	IK10, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Tamper Switch	1
Tamper Screw	Support
Installation	Surface
Material	Front Panel: Zinc alloy Rear Panel: Aluminum alloy Holder: Aluminum alloy
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby ≤2.5W, Work ≤7W
Working Temperature	-30°C to +60°C
Relative Humidity	10%RH–90%RH
Dimensions	163.0mm×73.0mm×54.5.0mm
Weight	0.8kg

Dimensions

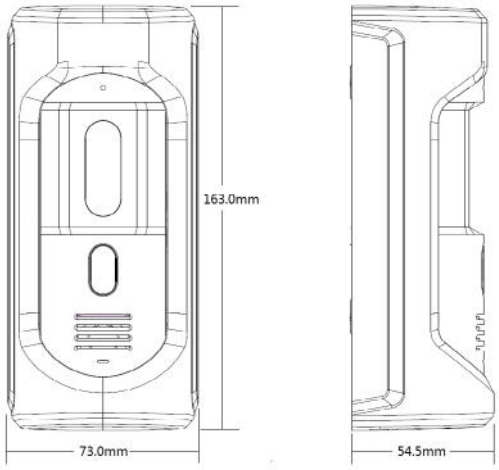


View Area

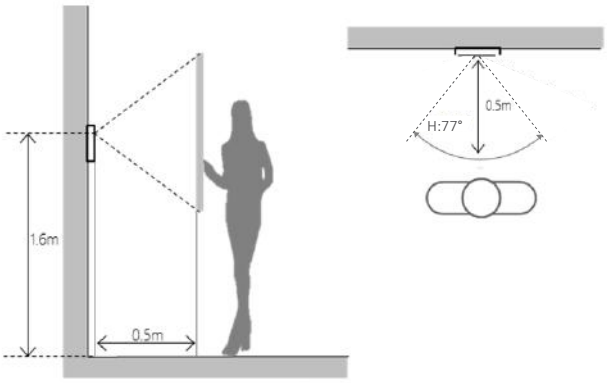

Application



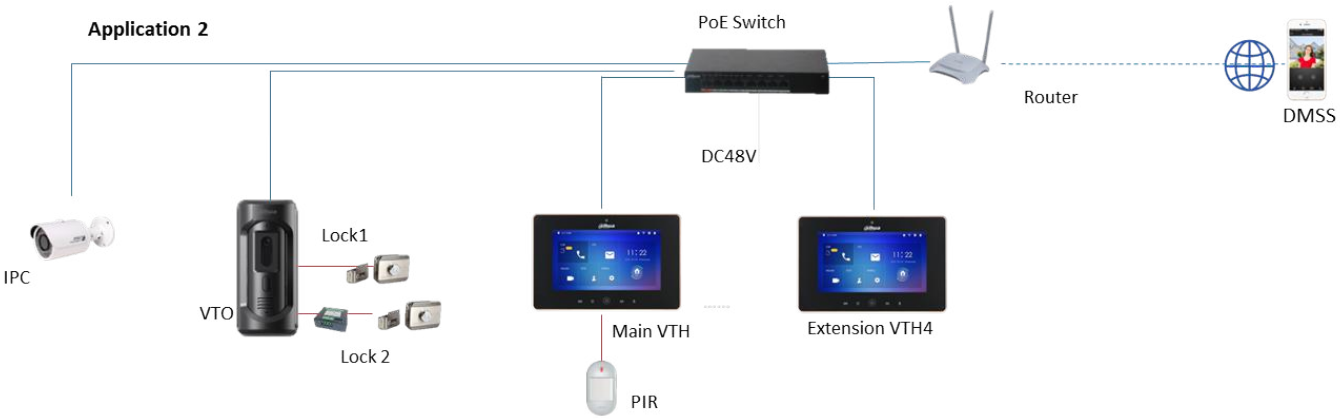

Rev 001.001 © 2019 Dahua. All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.